


SPECIFICATION




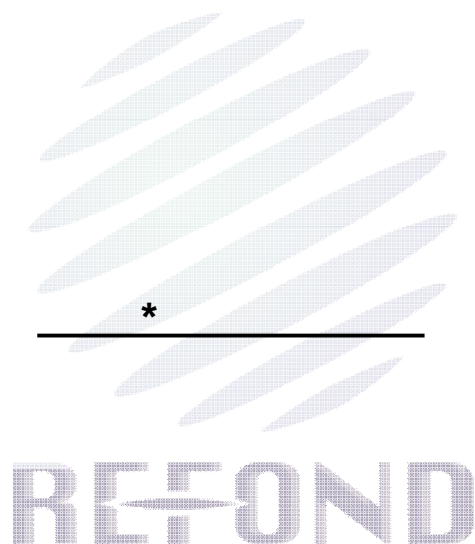


3
3
3
3
4
4
5
7
9
13
13
14
14
15
16
17
17

1. Description

1.1

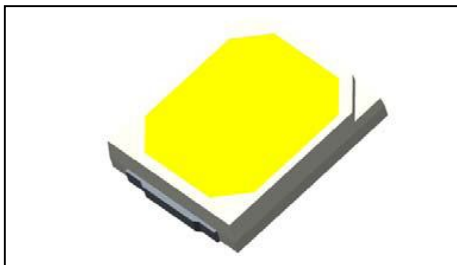


1.2Features

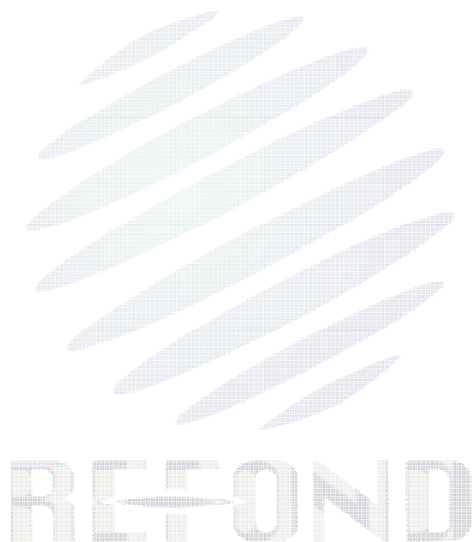

1.3Application

1.4Product Selection Table



1.5Package Dimension



REFOND

1.6Product Parameters





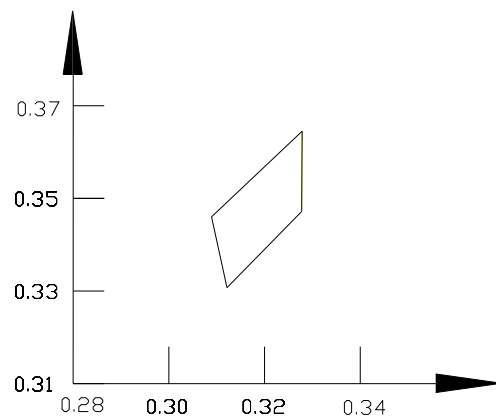
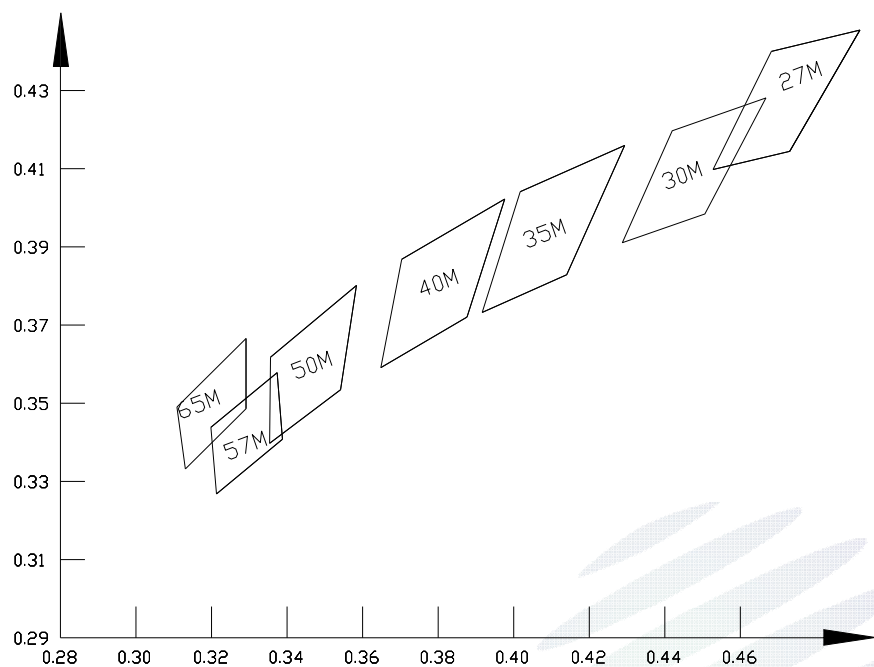




ERP 7-step


BIN CODE	X1	Y1	X2	Y2	X3	Y3	X4	Y4
27M	0.4528	0.4098	0.4731	0.4144	0.4916	0.4455	0.4682	0.4400
30M								
35M	0.4017	0.4041	0.4294	0.4160	0.4140	0.3829	0.3917	0.3732
40M	0.3704	0.3868	0.3976	0.4022	0.3876	0.3721	0.3648	0.3591
50M	0.3356	0.3618	0.3584	0.3801	0.3542	0.3535	0.3354	0.3397
57M	0.3198	0.3438	0.3374	0.3578	0.3388	0.3408	0.3213	0.3268
65N	0.3121	0.3307	0.3277	0.3472	0.3279	0.3645	0.3089	0.3460
65M	0.3131	0.3332	0.3291	0.3486	0.3291	0.3666	0.3108	0.3490

1.8 Typical optical characteristics curves

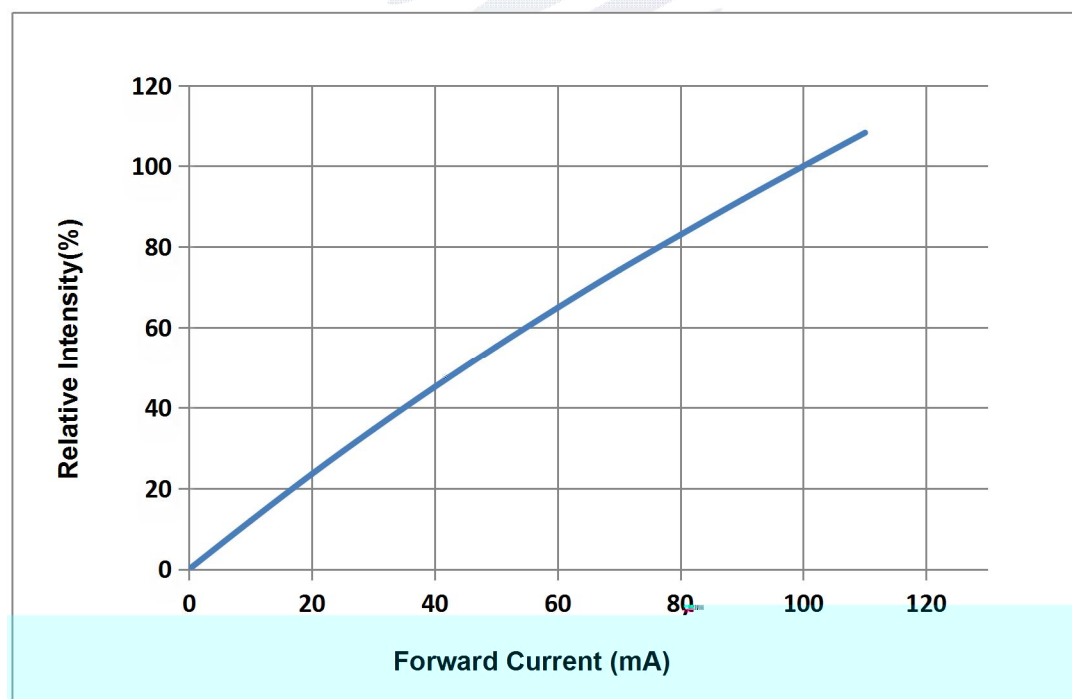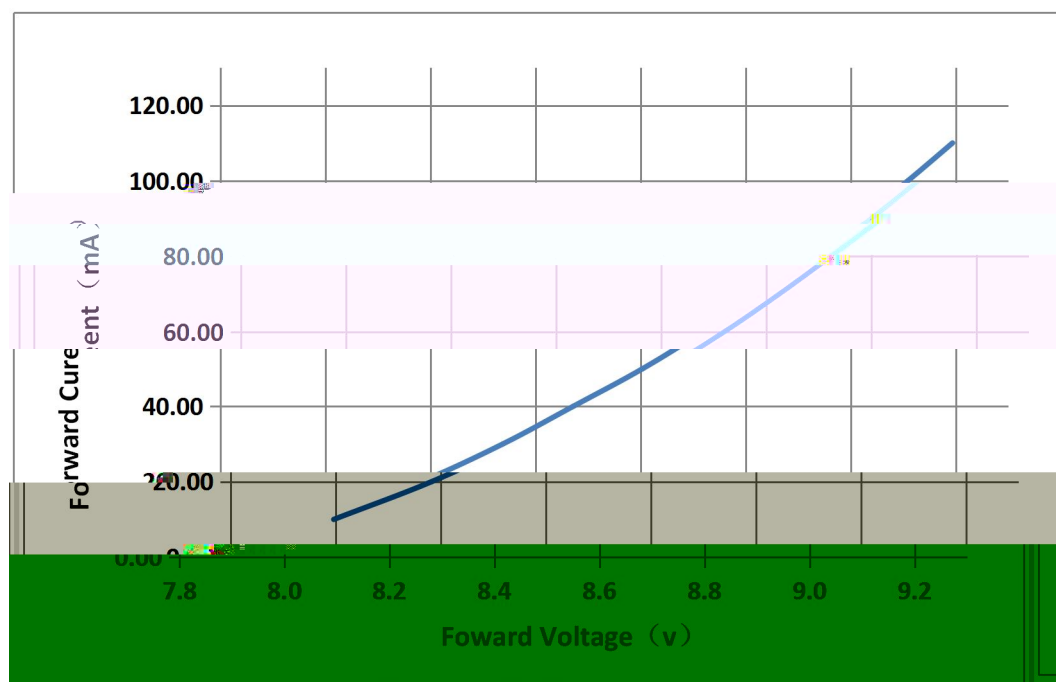

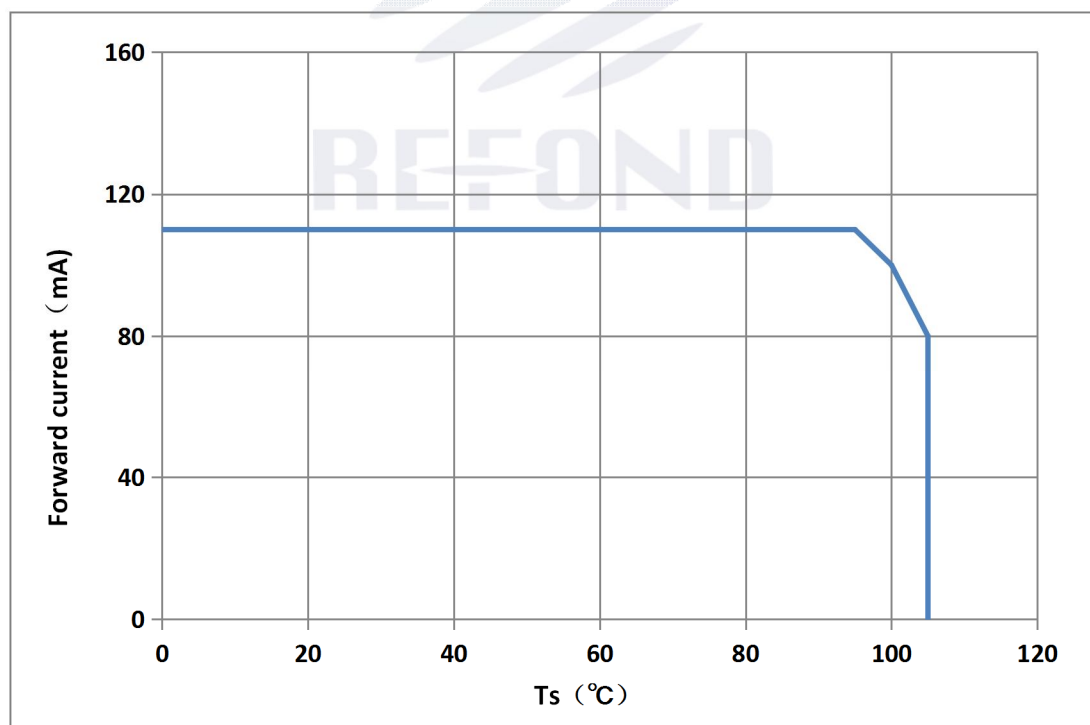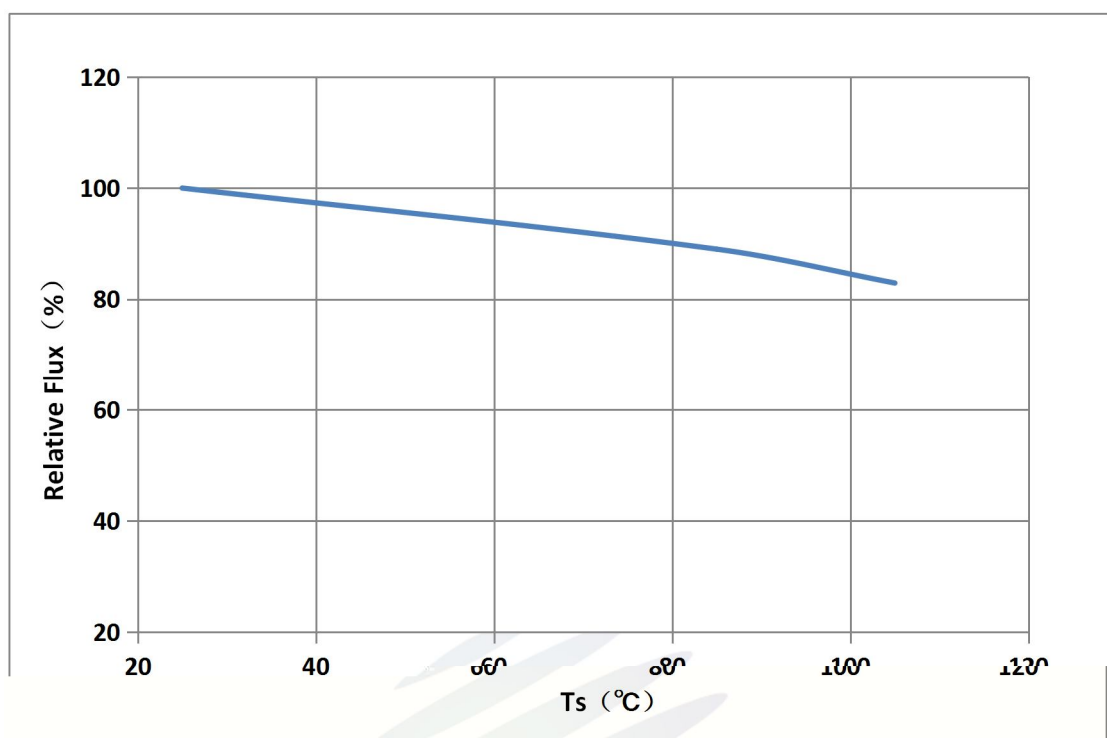

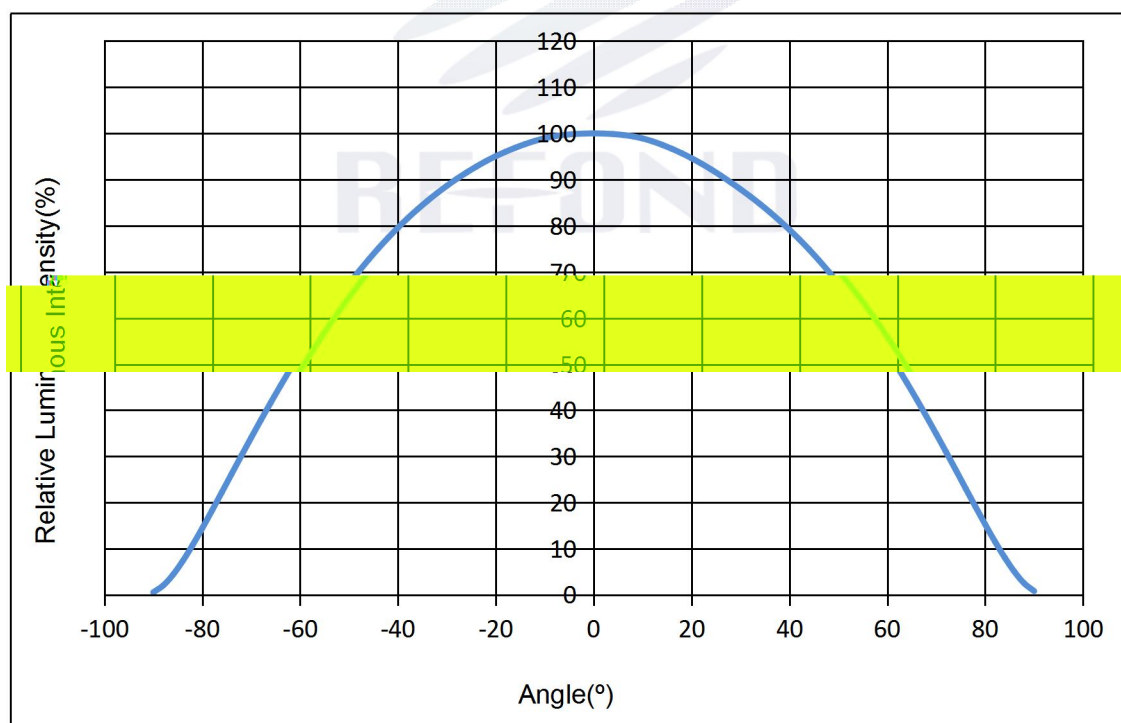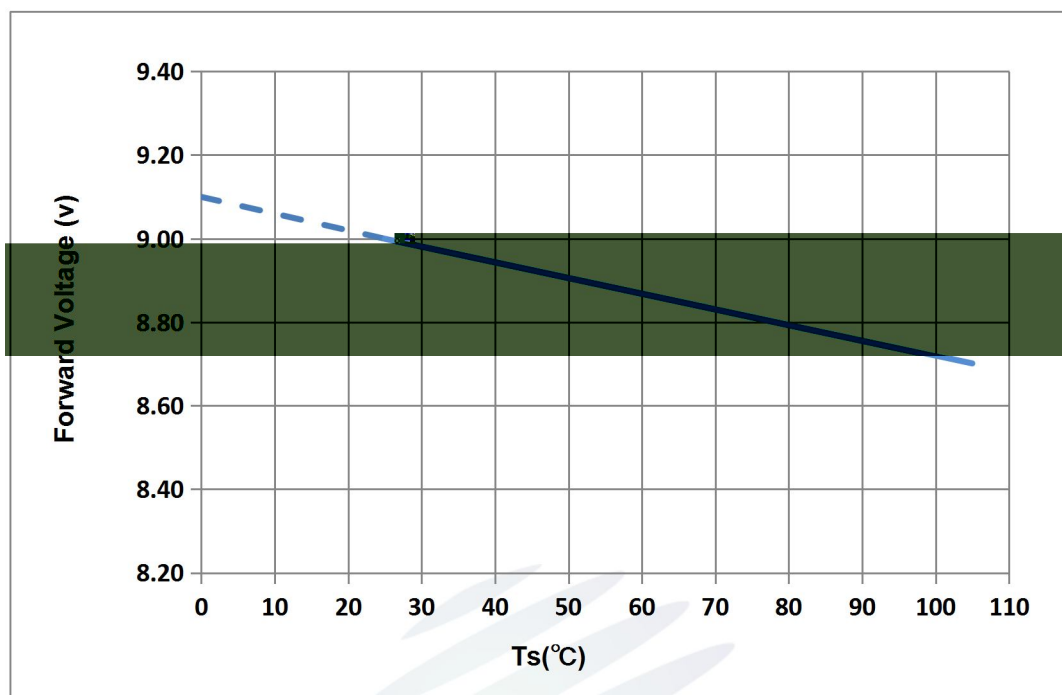



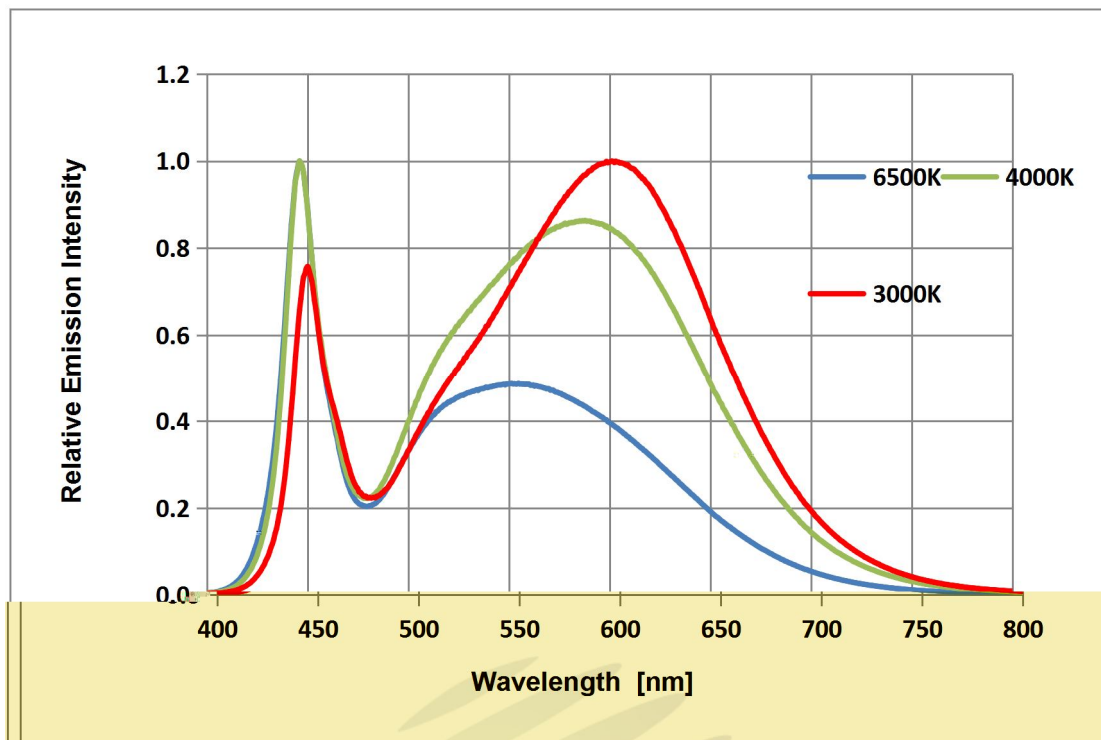


REFOND

2. Packaging


2.1 Packaging Specification

12000pcs

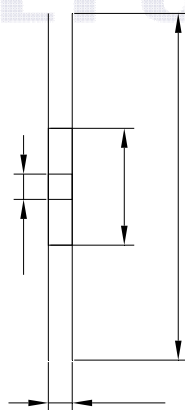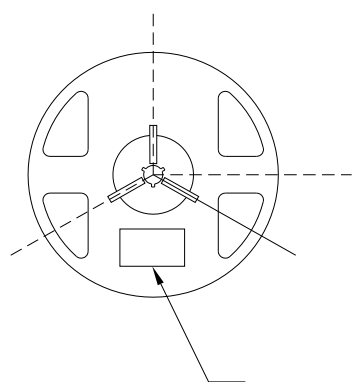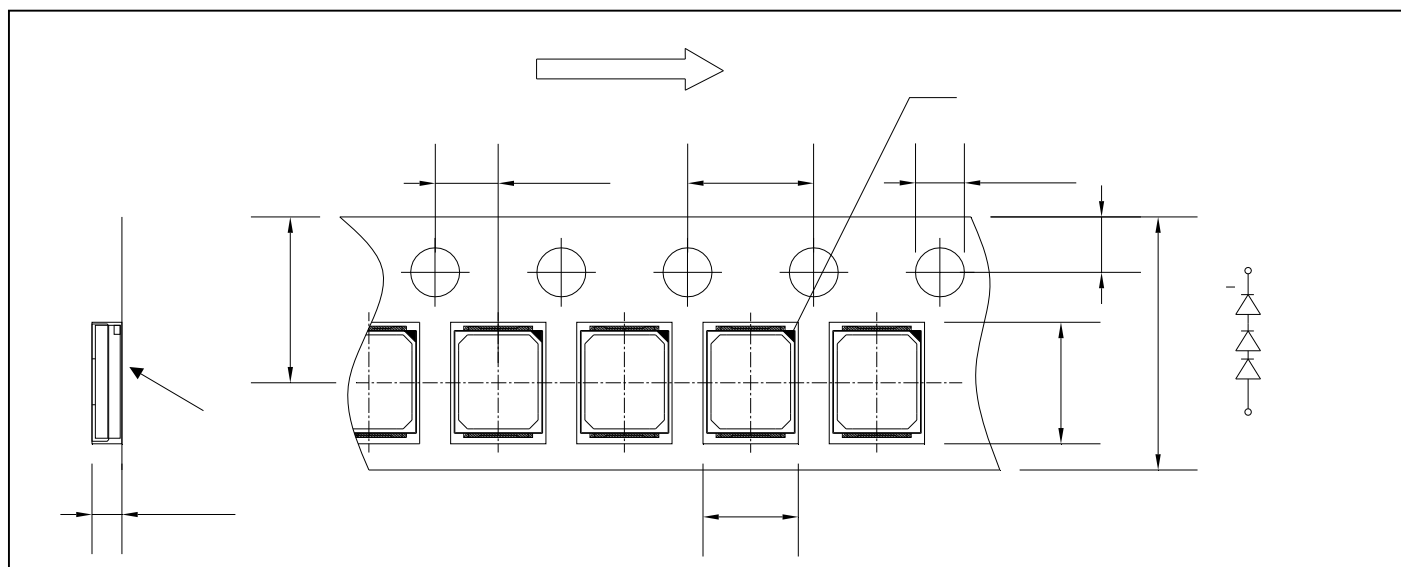


2.4 Reliability Test Items And Conditions

2.5 Criteria For Judging Damage

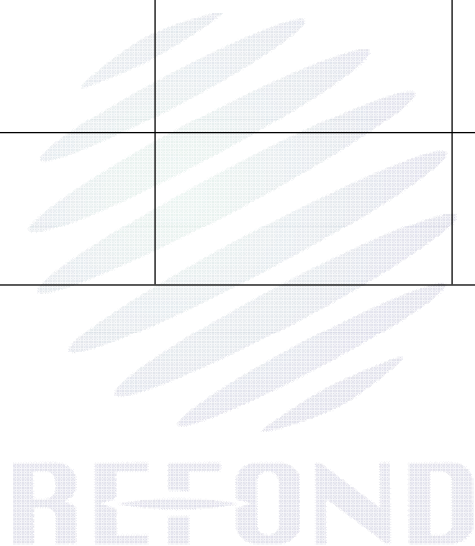




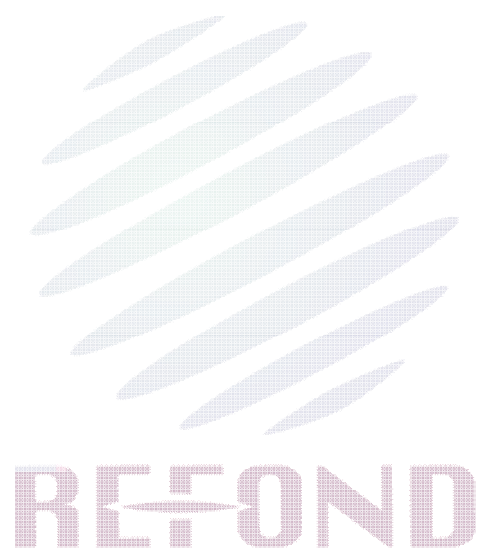

4. Handling Precautions

4.1 Handling Precautions



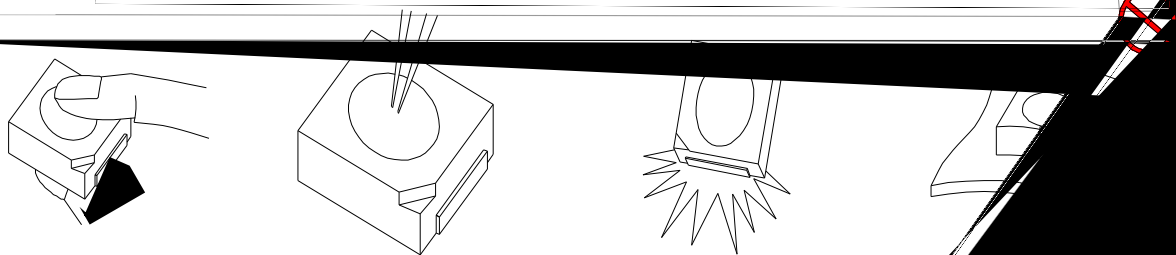

RE

REFOND

[illegible]

