SPECIFICATION

REFOND P/N

RF-A3E27-WYSG-B6

☐R&D

■Mass Production

0755-2967-5000
0755-6683-9322
sales@refond.com

1. Description

1.1General Description



The Yellow LED, which was fabricated by using a blue chip and the phosphor.

Product Package:2.7mmX2.0mmX0.6mm.

LED 2.7mmX2.0mmX0.6mm

1.2Features

EMC Package.EMC

Extremely wide viewing angle.

Suitable for all SMT assembly and solder process. SMT

Available on tape and reel.

Moisture sensitivity level: Level 2. Level2

RoHS compliant. RoHS

Qualifications: The product qualification test plan is based on the guidelines of AEC-Q102 Stress Test Qualification for Automotive Grade Discrete Semiconductors

AEC-Q102

1.3Application

Automotive Lighting Interior and Exterior.

0755-2967-5000
0755-6683-9322
sales@refond.com

1.4Package Dimension

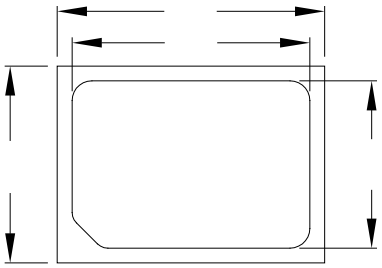

Fig.1-1 Top View



Fig.1-2 Side View

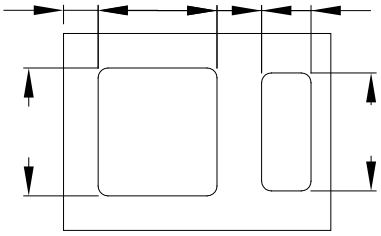

Fig.1-3 Bottom View

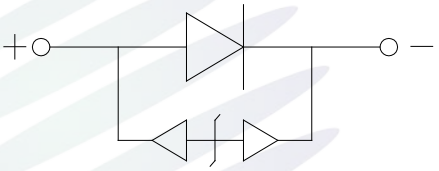

Fig.1-4 Polarity



Fig.1-5 Soldering Patterns

Notes

1. All dimensions units are millimeters.
2. All dimensions tolerances are ±0.2mm unless otherwise noted. ± 0.2

0755-2967-5000
0755-6683-9322
sales@refond.com

1.5Product Parameters

Table 1-1 Electrical / Optical Characteristics at Ts=25°C

Table 1-2 Absolute Maximum Ratings at Ts=25°C

0755-2967-5000
0755-6683-9322
sales@refond.com

Notes

1. 1/10 Duty cycle, 10ms pulse width. 10ms, 1/10.

2. The above forward voltage measurement allowance tolerance is ±0.1V. ± 0.1V.

3. The above color coordinates measurement allowance tolerance is ±0.005. ± 0.005.

4. The above luminous flux measurement allowance tolerance ±10%. ± 10%.

5. Care is to be taken that power dissipation does not exceed the absolute maximum rating of the product.

6. All measurements were made under the standardized environment of Refond.

7.When the LEDs are in operation the maximum current should be decided after measuring the package temperature, junction temperature should not exceed the maximum rate. LED

8. ESD yield is over 90% at 8000V ESD (HBM). ESD protection during products handing is needed. 90% LED ESD8000V ,

9. At 25 $_{e}$=30% 25 30%

1.6 Bin Range Of Forward Voltage and Luminous Flux (IF=300mA)

BIN (IF=300mA)

Table 1-3

V_F V	G0	H0	I0	
	2.8-3.0	3.0-3.2	3.2-3.4	

0755-2967-5000
0755-6683-9322
sales@refond.com

Fig. 1-6 The C.I.E Chromaticity Diagram CIE

Table 1-4

BIN CODE	CIE-X1	CIE-Y1	CIE-X2	CIE-Y2	CIE-X3	CIE-Y3	CIE-X4	CIE-Y4

0755-2967-5000
0755-6683-9322
sales@refond.com

1.7 Typical Optical Characteristics Curves

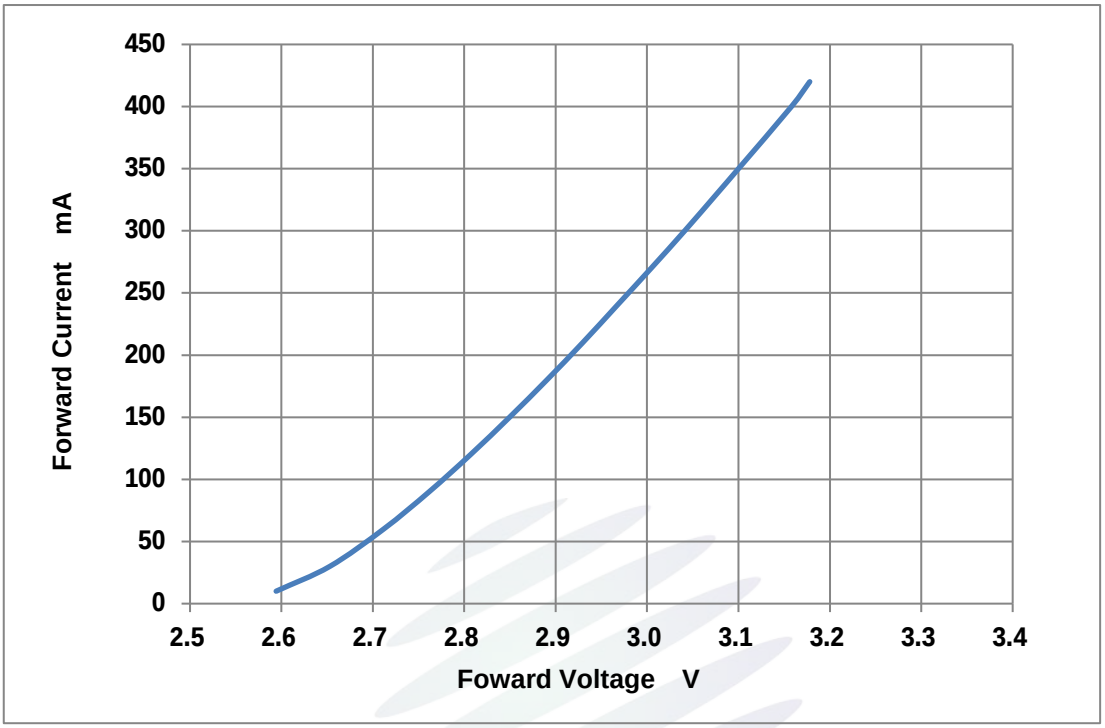

Fig. 1-7 Forward Voltage Vs Forward Current

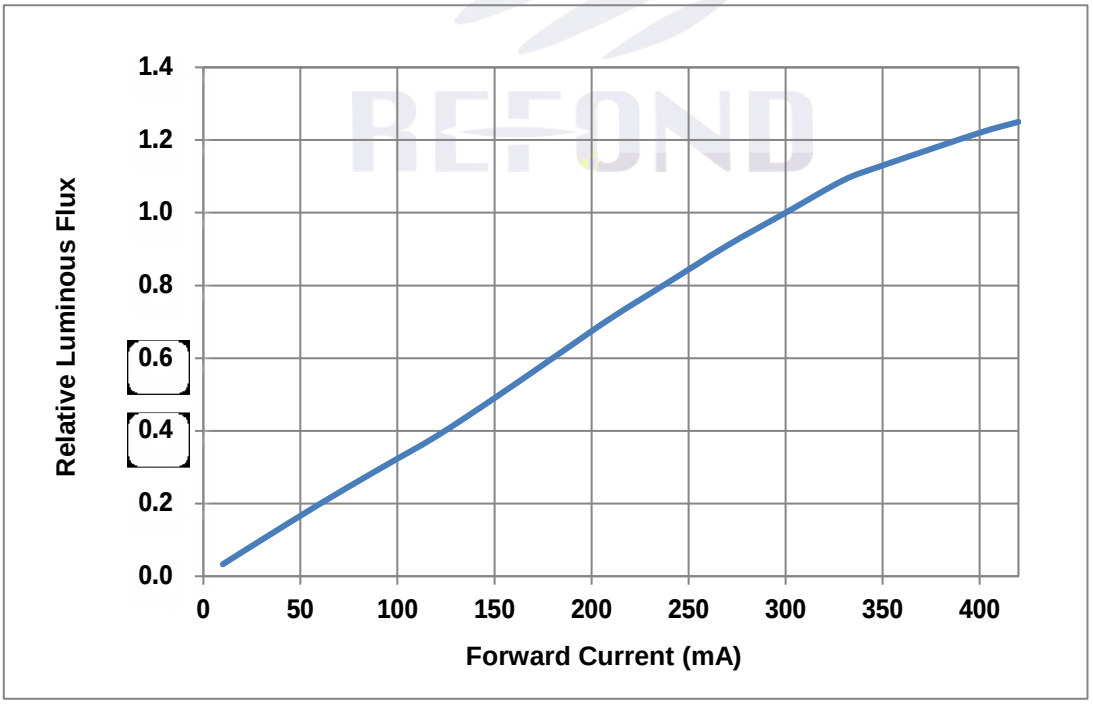

Fig. 1-8 Forward Current Vs Relative Luminous Flux

0755-2967-5000
0755-6683-9322
sales@refond.com

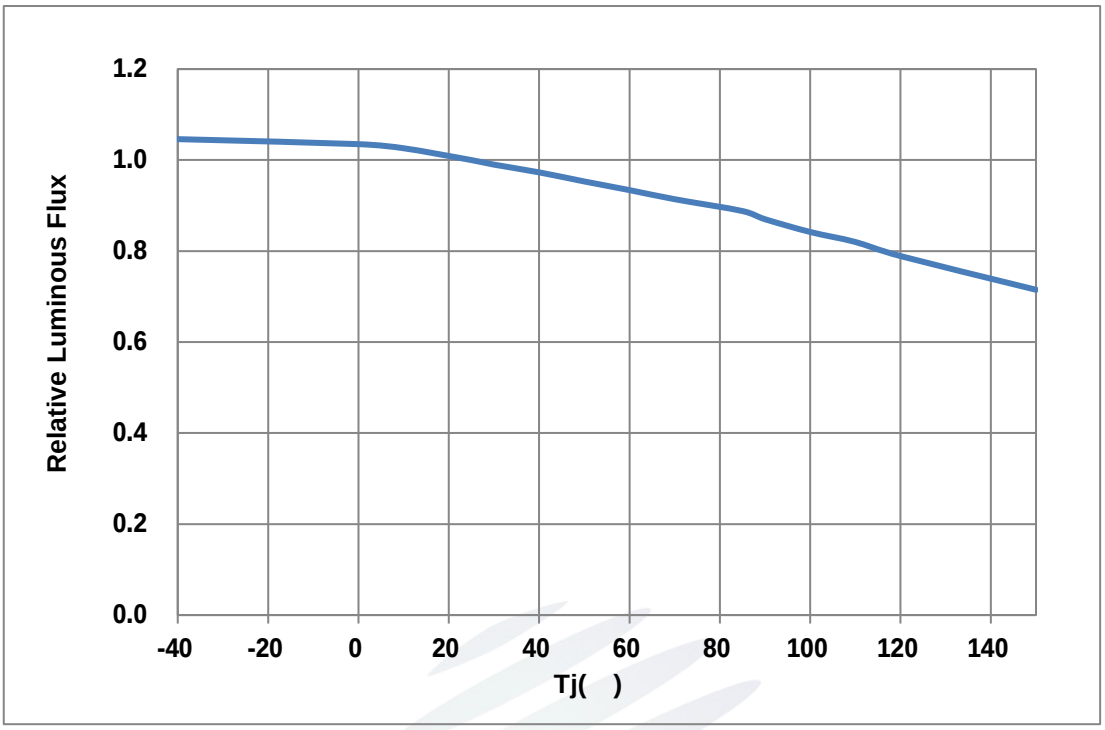

Fig. 1-9 Junction Temperature Vs Relative Luminous Flux

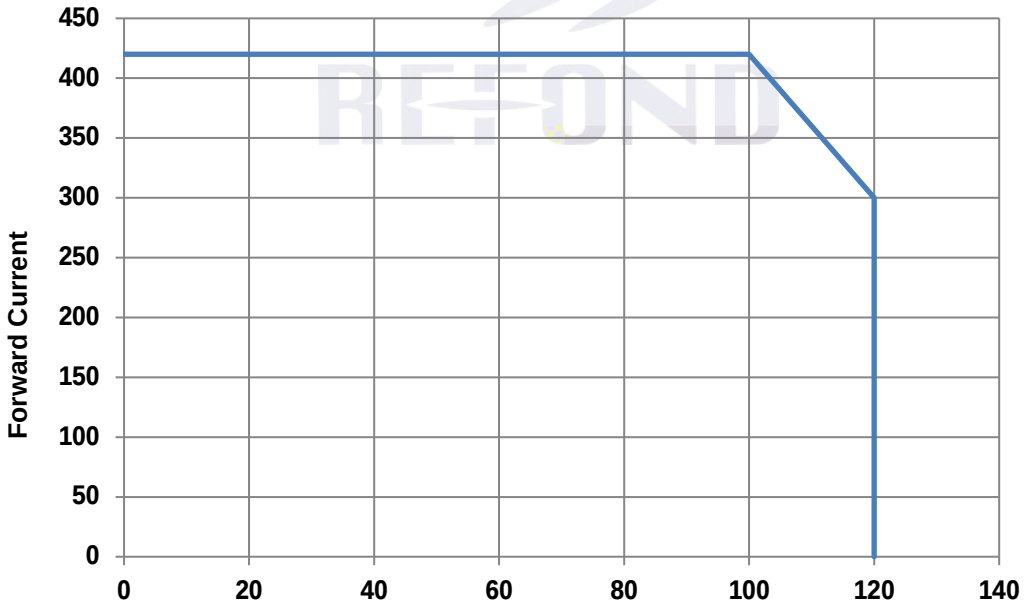

Fig. 1-10 Solder Temperature Vs Forward Current

0755-2967-5000
0755-6683-9322
sales@refond.com

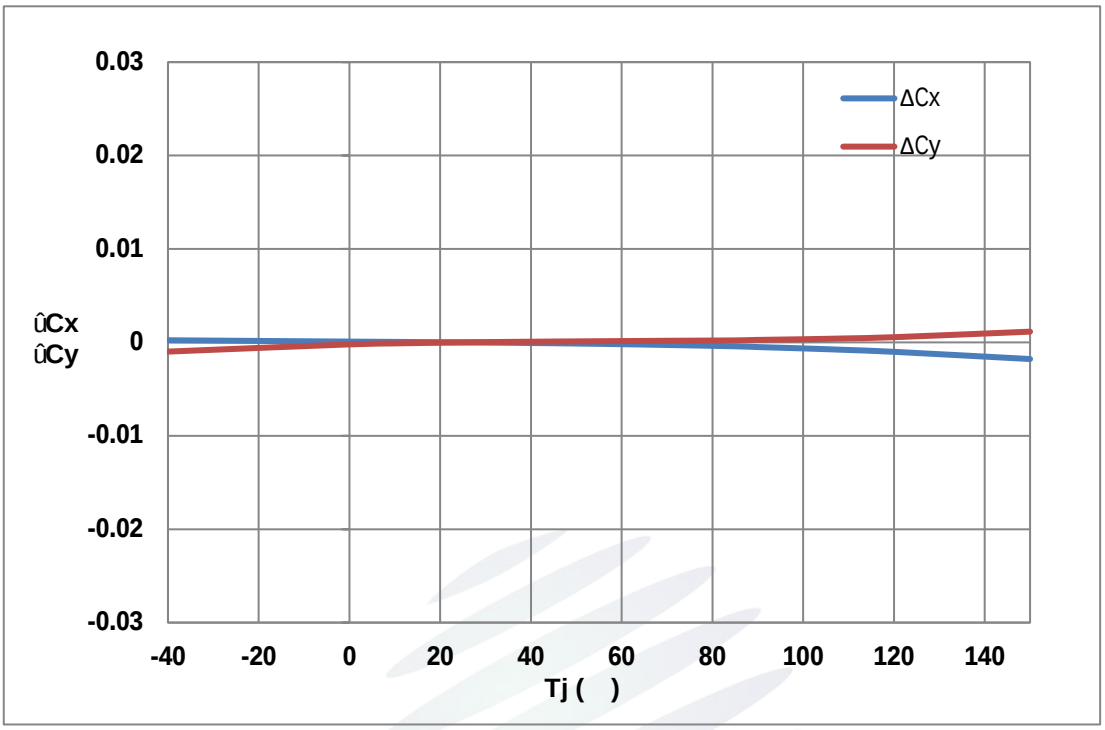

Fig. 1-13 Chromaticity Coordinate Shift Vs Junction Temperature

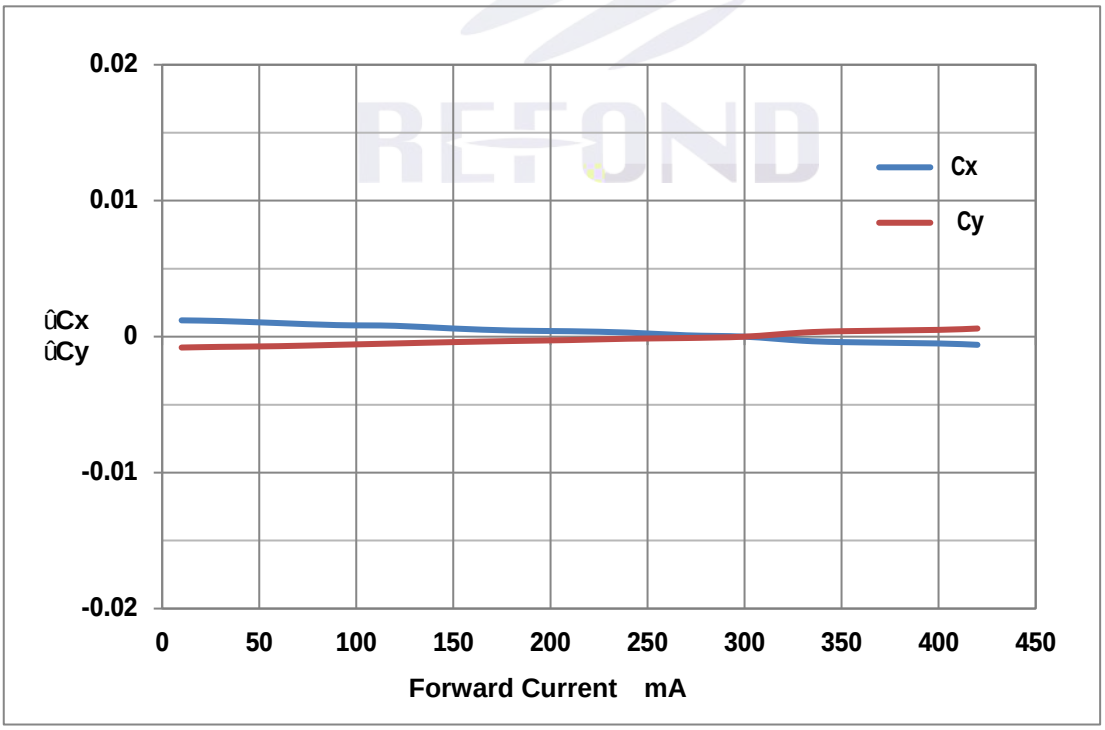

Fig. 1-14 Chromaticity Coordinate Shift Vs Forward Current

0755-2967-5000
0755-6683-9322
sales@refond.com

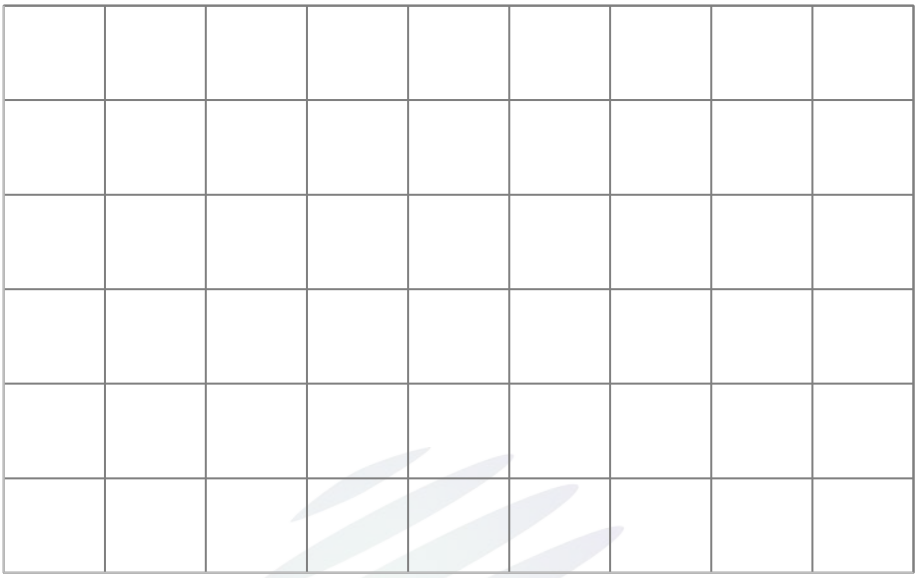

Fig. 1-15 Spectrum Distribution

0755-2967-5000
0755-6683-9322
sales@refond.com

2. Packaging

2.1 Packaging Specification

Package:4000pcs/reel. 4000pcs

2.1.1Carrier Tape Dimension

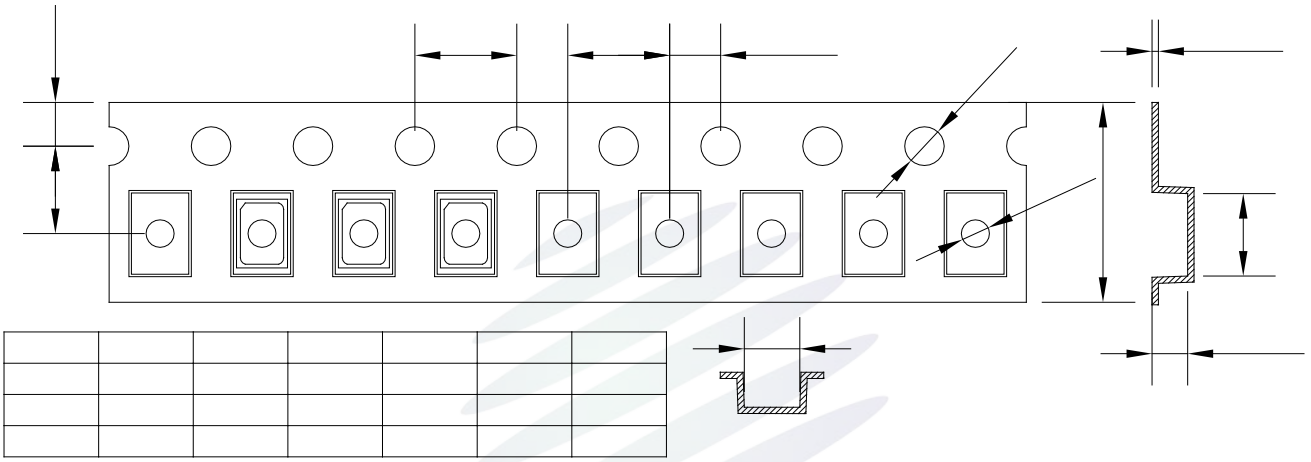

Fig.2-1 Carrier Tape Dimension

2.1.2Reel Dimension

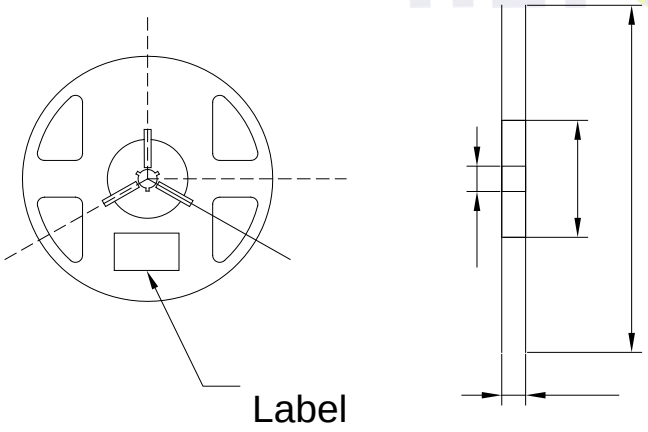

Fig.2-2Reel Dimension

Table 2-1Reel Dimension

A	12 ± 0.1mm
B	180 ± 1mm
C	60 ± 1mm
D	13.0 ± 0.5mm

Notes

The tolerances unless mentioned ±0.1mm. Unit : mm ± 0.1

0755-2967-5000
0755-6683-9322
sales@refond.com

2.1.3Label Form Specification

able 2-2 Specification

PART NO.	Part Number
SPEC NO.	Spec Number
LOT NO.	Lot Number
BIN CODE	Bin Code
XY	Luminous flux Chromatic

Fig. 2-3 Label Form Specification

2.2Moisture Resistant Packing

Fig.2-4Moisture Resistant Packing

2.3Cardboard Box

Fig.2-5Cardboard Box

0755-2967-5000
0755-6683-9322
sales@refond.com

2.4Reliability Test Items And Conditions

Table 2-3 Reliability Test Items And Conditions

Test Items	Ref.Standard	Test Condition	Time	Quantity	Ac/Re /
Reflow	JESD22-B106	Temp:260 max T=10 sec	2times	20pcs.	0/1
MSL2 2	JESD22-A113	85 / 60%R_H	168 hrs.	20pcs.	0/1
Thermal Shock	JEITAED-4701 300307	-40 15min 10s 125 15min	1000 cycle	20pcs.	0/1
Life Test	JESD22-A108	Ta=105 IF=300mA	1000hrs.	20pcs.	0/1
High Temperature High Humidity Life Test	JESD22-A101	85 / 85%R_H IF=300mA	1000hrs.	20pcs.	0/1

0755-2967-5000
0755-6683-9322
sales@refond.com

2.5 Criteria For Judging Damage

Table 2-4Criteria For Judging Damage

Test Items	Symbol	Test Condition	Criteria For Judgement	
			Min.	Max.
Forward Voltage	V_F	IF=300mA	-	U.S.L*)x1.1
Reverse Current	I_R	V_R = 5V	-	U.S.L*)x2.0
Luminous Flux		IF=300mA	L.S.L*)x0.7	-

Notes

1.U.S.L: Upper standard level L.S.L: Lower standard level

2.The above reliability tests is based on the verification of a single/strip LED of Refond's existing experimental platform,the reliability experiment was taken under good heat dissipation conditions. when customers applies the LED to the series and parallel circuit, should take consideration of all the factors such as the current, voltage distribution, heat dissipation and others. / LED

LED

3.The technical information shown in the data sheets is limited to the typical characteristics and circuit examples of the referenced products. It does not constitute the warranting of industrial property nor the granting of any license.

0755-2967-5000
0755-6683-9322
sales@refond.com

0755-2967-5000
0755-6683-9322
sales@refond.com

4. Handling Precautions

4.1 Handling Precautions

(1) LED operating environment and sulfur element composition cannot be over 100PPM in the LED mating usage material. This is provided for informational purposes only and is not a warranty or endorsement.LED

LED 100PPM.

(2) In order to prevent ex-ternal material from getting into the inside of LED, which may cause the malfunction of LED, the single content of Bromine element is required to be less than 900PPM,the single content of Chlorine elementis required to be less than 900PPM,the total content of Bromine element and Chlorine element in the external materials of the application products is required to be less than 1500PPM. This is provided for informational purposes only and is not a warranty or endorsement. LED LED

900PPM 900PPM

1500PPM.

(3) VOCs (Volatile organic compounds) emitted from materials used in the construction of fixtures can penetrate silicone encapsulants of LEDs and discolor when exposed to heat and photonic energy. The result can be a significant loss of light output from the fixture. Knowledge of the properties of the materials selected to be used in the construction of fixtures can help prevent these issues. Refond advises against the use of any chemicals or materials that have been found or are suspected to have an adverse affect on device performance or reliability. To verify compatibility, Refond recommends that all chemicals and materials be tested in the specific application and environment for which they are intended to be used. Attaching LEDs, do not use adhesives that outgas organic vapor. LED

LED LED

LED

(4) Handle the component along the side surface by using forceps or appropriate tools; Do not directly touch or Handle the silicone lens surface, it may damage the internal circuitry.

0755-2967-5000
0755-6683-9322
sales@refond.com

Table 4-1 Storage

Conditions		Temperature	Humidity	Time
Storage	Before Opening Aluminum Bag	≤ 30	≤ 75%	Within 1 Year From Date
	After Opening Aluminum Bag	≤ 30	≤ 60%	Recommended for use within 24 hours 24
Baking		60 ± 5	-	≥ 24hours 24

(8) If the moisture absorbent material silica gel has faded away or the LEDs have exceeded the storage time,baking treatment should be performed after unpacking and based on the following condition 60 5 for above 24 hours.

60 ± 5 24

If the package is flatulence or damaged,please notify the sales staff to assist.

(9)Similar to most Solid state devices; LEDs are sensitive to Electro-Static Discharge (ESD) and Electrical s7 00 TF(o a)

0755-2967-5000
0755-6683-9322
sales@refond.com

Version History/

Date	Revisor	Version	Verifier	Remarks
2022/3/18	Chen Jing	E0	Zhu yiming	New issue
2023/4/26	Chen Jing	E1	Zhu yiming	Template update
2023/7/26	Chen Jing	E2	Zhu yiming	Revise

0755-2967-5000
0755-6683-9322
sales@refond.com