



# Radiant Source Model Report




<p>P ID:</p> <p>S T : LED</p> <p>M N :</p> <p>S N :</p> <p>M : S</p> <p>H B : 30</p> <p>M.R W (E- ): M.R L :</p> <p>T : P</p> <p>SIG O : SIG400: V V</p> <p>S D N :</p> <p>□</p>	<p>A ( ): 6.4V</p> <p>C A ( ): 1000 A</p> <p>W M : 6.4W</p> <p>C : 0.0.3243 C : 0.3374 853.0</p> <p>D S : 05-N -2023</p> <p>N M □ : 2736</p> <p>A R : 0 90, S 5</p> <p>P R : 0 360, S 5</p> <p>R L /W : 133.2 /W</p>
--	--

T O C C  
 (T  
 = 0.3435 , = -0.005 , = 0.00 )

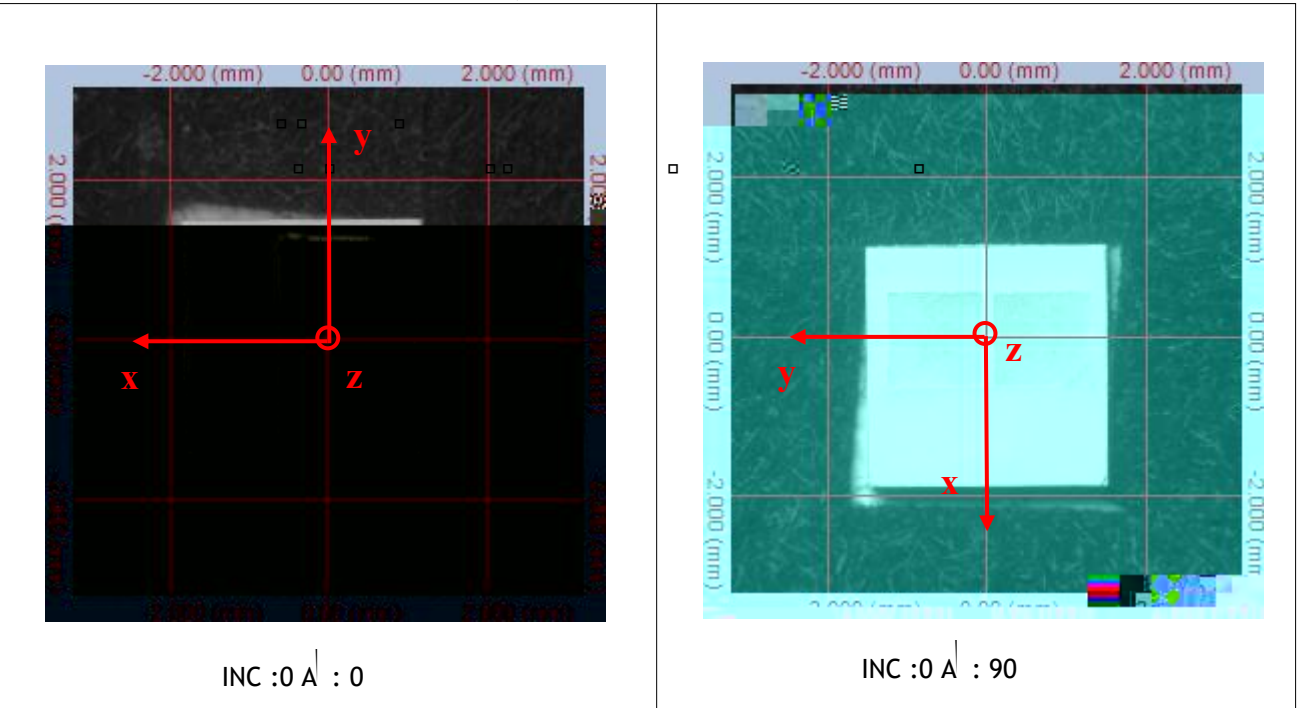

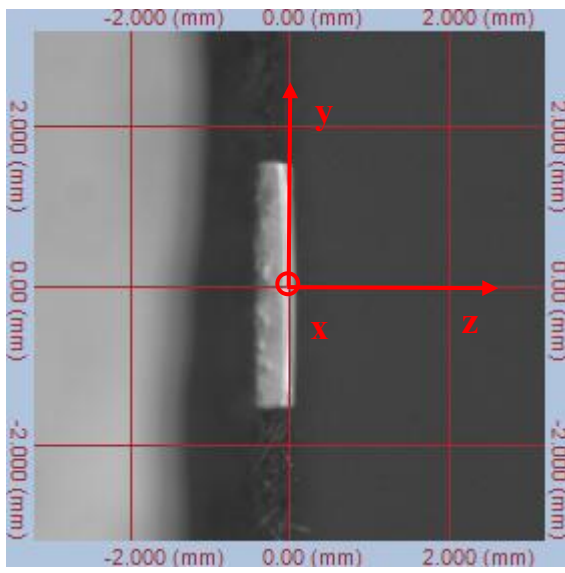

INC :90 A<sup>1</sup> : 0

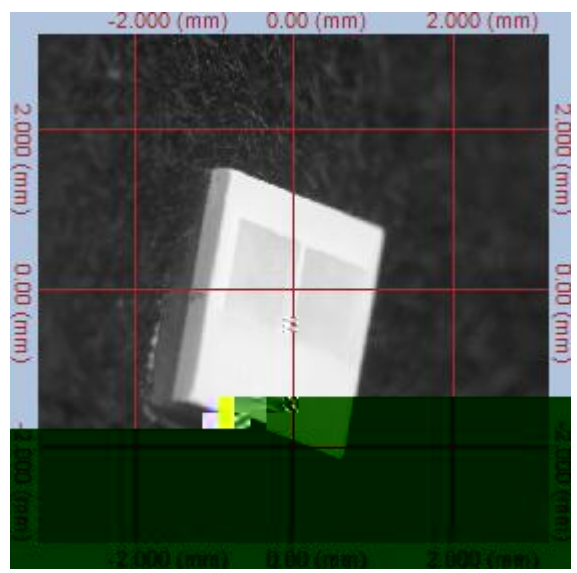

INC :50 A<sup>1</sup> : 75

